


FICHA TÉCNICA / FICHE TECHNIQUE / TECHNICAL SHEET

SERIE 158 C



Características / Caractéristiques / Characteristics

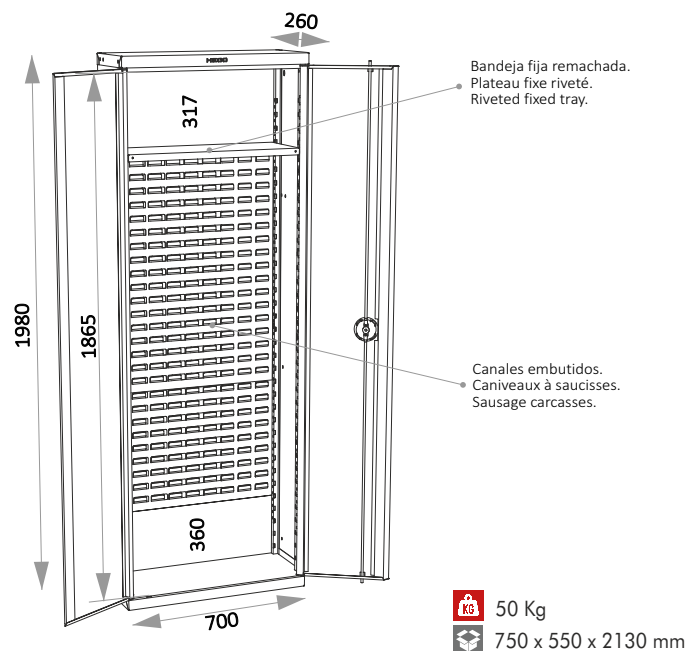

Apertura de las puertas a 180°.
Ouverture des portes à 180°.
180° doors opening.



Cierre con llave 2 puntos (2 llaves).
Fermeture à clé 2 points (2 clés).
2 point key Locking (2 keys).



Bandeja fija remachada con carga repartida
Plateau fixe riveté avec charge répartie
Fixed tray riveted with distributed load



Cartón individual y palet.
Carton simple et palette.
Single cardboard and pallet.

Componentes Composants Components

Material Matériel / Material

Armazón.
Chassis.
Frame.

Chapa pulida
Tôle polie
Polished sheet

1 mm

Puertas.
Portes.
Doors.

Chapa pulida
Tôle polie
Polished sheet

0,6 mm

Bandeja.
Plateau.
Shelf.

Chapa pulida
Tôle polie
Polished sheet

1 mm

Color
Couleur
Colour

Azul martelé
Bleu martelé
Hammered blue



Color opcional
Couleur sur demande
Choice of colours

Acabado Finition / Finishing

Soldado por resistencia, secado a estufa, previo desengrasado y fosfatado.
Soudée par résistance, séchée au four après dégraissage et phosphatage.
Welded by resistance, drying oven prior degreasing and phosphate.

Cierre.
Fermeture.
Closure.




ABS inyectado y metal cromado
ABS injecté et métal chromé
Injected ABS and chromed metal


Se suministra con dos llaves.
Livré avec deux clés.
Supplied with two keys.

Accesorios opcionales Accessoires optionnels Optional accessories


SERIE V-BULL



SERIE V-BULL 1
0,4 l
0,046 kg




SERIE V-BULL 2
1,2 l
0,110 kg



SERIE V-BULL 3
3,5 l
0,226 kg

SERIE CE P 1



SERIE CE A 1



Cierre electrónico
Verrou électronique
Electronic locking